99 **ADF**

ESPECIFICACIONES INSTALACIÓN
INSTALLATION FEATURES

Instalación *Installation*	Embutir *Flush*
Reversible *Reversible*	Sí *Yes*
Alto *High*	66 mm
Ancho *Width*	16 mm
Profundo *Deep*	25,50 mm
Profundidad aleta *Jaw deep*	4,70 mm
Ajuste aleta flex *Flex jaw adjust*	+3 -0 mm
Ciclos testeados *Tested cycles*	200.000
Rango temperatura trabajo *Temperature working range*	-25°C/50°C
Resistencia a rotura *Breaking resistance*	3500 N

PLANO TÉCNICO
TECHNICAL DRAW

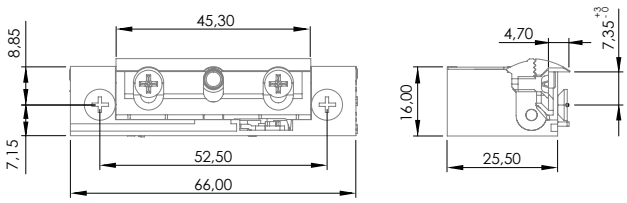

FUNCIONES
FUNCTIONS

Automático *Delay action*	Sí (Normal) *Yes (Standard)*
Desbloqueo *Unlatching*	Sí *Yes*
Microswitch (305) *Microswitch (305)*	No *No*
Diodo *Diode*	Opcional *Optional*
Varistor *Varistor*	Opcional *Optional*

ESPECIFICACIONES ELÉCTRICAS
ELECTRIC FEATURES

RANGO VOLTAJE *VOLTAGE RANGE*	10-24		6-12	8-12	24	24 (424)	10-28	12 (512)	24 (524)
	AC-DC		AC-DC	AC-DC	AC-DC	DC	DC	DC	DC
FUNCIONAMIENTO *FUNCTIONING*	FAIL SECURE		FAIL SECURE	FAIL SECURE	FAIL SECURE	FAIL SECURE	FAIL SAFE	FAIL SAFE	FAIL SAFE
	N	A-AB							
RESISTENCIA BOBINA (Ω) *COIL RESISTANCE (Ω)*	43	38	8	17	58	132	43	63	230
CICLO CARGA ELÉCTRICA (%ED) *ELECTRIC DUTY CYCLE (%ED)*	100% ED 12 VDC	100% ED 12 VDC	10% ED	20% ED	20% ED	100% ED 24 VDC	100% ED 12-24 VDC	100% ED 12 VDC	100% ED 24 VDC
CONSUMO CORRIENTE AC (mA) *AC CURRENT CONSUMPTION (mA)*	175 (10V) 200 (12V) 400 (24V)	210 (10V) 250 (12V) 510 (24V)	565 (6V) 1150 (12V)	350 (8V) 510 (12V)	340	-	-	-	-
CONSUMO CORRIENTE DC (mA) *DC CURRENT CONSUMPTION (mA)*	240 (10V) 280 (12V) 570 (24V)	270 (10V) 320 (12V) 650 (24V)	750 (6V) 1500 (12V)	490 (8V) 715 (12V)	410	200	165 (10V) 190 (12V) 78 (24V)	200	110
MÁXIMA PRECARGA APERTURA AC *MAXIMUM PRELOAD OPEN AC*	250N (12V) 360N (24V)		-	-	-	-	-	-	-
MÁXIMA PRECARGA APERTURA DC *MAXIMUM PRELOAD OPEN DC*	55N (12V) 220N (24V)		-	-	-	-	-	-	-
TOLERANCIA BOBINA *COIL TOLERANCE*	Máxima tolerancia bobina 5% *Max coil tolerance 5%*								

José Serrano 6, Siete Aguas
46392 Valencia (Spain)