

Combination PZAS 110

Panic function, double-leaf, automatic locking of passive leaf, SECURY



Inside



Outside

Functional description

Active leaf

Inside

The active leaf can be opened by the lever handle at any time (panic function).

With a SECURY lock, the door locks automatically without having to use the key.

Outside

The active leaf is opened using the key and lever handle.

With a SECURY lock, the door locks automatically without having to use the key.

- Panic function B
- Panic function C

Passive leaf

Inside

Active and passive leaf can be opened by the vertical lever at any time (panic function on both leaves). Upon closing, the passive leaf is locked automatically via the vertical rods. If the door is opened by the passive leaf, the carrier bar ensures that the active leaf is carried along far enough to activate the door-leaf coordinator, so the leaves can close in the appropriate sequence. This also guarantees that the two leaves cannot jam, not even with a small clearance. The closing sequence of the door is controlled by the door-leaf coordinator integrated in the door closer.

Possible applications

- Emergency exits to EN 179 in areas not accessible to the public
- Suitable for fire and smoke protection doors
- As the lever handle is on the outside, the door can be used as a connecting door from both sides depending on the particular panic function
- Suitable for very high entrance doors with a tendency to warp (only by agreement with the door fabricator and in compliance with approvals)
- Automatic multi-point locking
- Enhanced burglar protection and gasket pressure thanks to the additional locking
- Optional combination with electric access control and/or escape door security components (see the following pages)

Recommendation

- Entrance doors to administrative and office buildings
- Homes for the elderly
- Service doors
- Museums
- Airports
- Stadiums
- Administrative areas


Combination PZAS 110

Panic function, double-leaf, automatic locking of passive leaf, SECURY



Active leaf:

① = SECURY panic lock

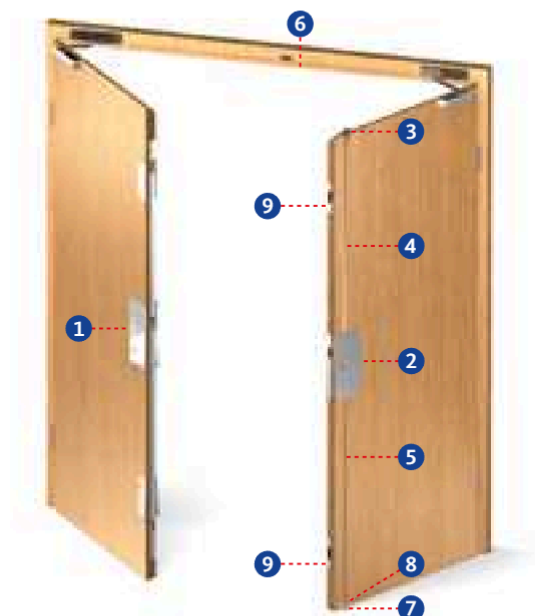

Passive leaf:

- ② = Shoot-bolt lock
- ③ = Passive leaf control lock
- ④ = Vertical rod
- ⑤ = Solid vertical rod
- ⑥ = Latchbolt striker
- ⑦ = Floor striker
- ⑧ = Guide plate for vertical rod
- ⑨ = Striker

Active leaf							
No.	Product / Panic function	Backset [mm]	20 mm faceplate for rebated doors		24 mm faceplate for flush doors		Additional PC/CH-RC versions see page
			DIN LH	DIN RH	DIN LH	DIN RH	
1	SECURY 2111 / B	55	6-38725-09-L-8	6-38725-09-R-8	6-38725-12-L-8	6-38725-12-R-8	362
		65	6-38725-02-L-8	6-38725-02-R-8	6-38725-13-L-8	6-38725-13-R-8	362
		80	6-38725-10-L-8	6-38725-10-R-8	6-38725-14-L-8	6-38725-14-R-8	362
	SECURY 2113 / C	55	6-39008-08-L-8	6-39008-08-R-8	6-39008-11-L-8	6-39008-11-R-8	366
		65	6-39008-09-L-8	6-39008-09-R-8	6-39008-12-L-8	6-39008-12-R-8	366
		80	6-39008-10-L-8	6-39008-10-R-8	6-39008-13-L-8	6-39008-13-R-8	366
	SECURY 2171 / C Electrically coupled	65	6-39014-11-L-8	6-39014-11-R-8	6-39014-07-L-8	6-39014-07-R-8	378

Passive leaf							
No.	Product	Backset [mm]	Angled faceplate 20 x 12 mm		Lipped faceplate		Additional versions see page
			DIN LH	DIN RH	DIN LH	DIN RH	
2	2189	65	B 2189 0009	B 2189 0008	B 2189 0001	B 2189 0000	348+350
		80	B 2189 0011	B 2189 0010	B 2189 0003	B 2189 0002	348+350
		100	B 2189 0013	B 2189 0012	B 2189 0005	B 2189 0004	348+350
No.	Product	Backset [mm]	Faceplate 20 mm		Faceplate 24 mm		See page
3	1895	65	B 1895 0002		B 1895 0003		385
		80 + 100	B 1895 0004		B 1895 0005		385
No.	Product	Backset [mm]	Rod length	For door heights up to			See page
4	9036	65, 80, 100	1135 mm	2250 mm	B 9036 0001		411
			1385 mm	2500 mm	B 9036 0002		411
5	9006	Solid	1187 mm	–	B 9006 0004		410
No.	Product						See page
6	9000	For 1895	Non-handed		B 9000 0490		397
7	9009 or B-0028	B 9009 0001 or B-00280-20-0-8					412
8	9019	B 9019 0001					413
9	9-38551	9-38551-xx-x-xxx					408
	6-31985	6-31985-xx-x-x					406