


Combination PES 120

Panic function, single-leaf, SECURY



Inside

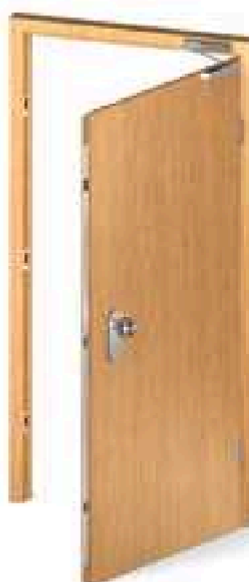

Outside

Functional description

Inside

The door can be opened by the lever handle at any time (panic function).

With a SECURY lock, the door is automatically locked without having to use the key.

– Panic function E

Outside

The door can only be unlocked with the key.

Locking is effected automatically.

Possible applications

- Emergency exits to EN 179 in areas not accessible to the public
- Suitable for fire and smoke protection doors
- As the fixed knob or push/pull handle is on the outside, access from the outside is only possible using the key
- Suitable for very high entrance doors with a tendency to warp (only by agreement with the door fabricator and in compliance with approvals)
- Automatic multi-point locking
- Enhanced burglar protection and gasket pressure thanks to the additional locking
- Especially suitable in combination with an electric A-opener for use with intercoms on entrance doors (remote opening) and automatic swing-door drives (barrier-free)
- Optional combination with electric access control and/or escape door security components (see the following pages)

Recommendation

- Doors on transformer stations and boiler rooms
- Lift
- Underground car parks
- Entrance doors for warehouses and office buildings
- Entrance to tenements and apartment buildings

Combination PES 120

Panic function, single-leaf, SECURY



Active leaf:

- ① = SECURY panic lock
- ② = Latchbolt striker



Active leaf							
No.	Product / Panic function	Backset [mm]	20 mm faceplate for rebated doors		24 mm faceplate for flush doors		Additional PC/CH-RC versions see page
			DIN LH	DIN RH	DIN LH	DIN RH	
1	SECURY 2116 / E	55	6-38724-03-L-8	6-38724-03-R-8	6-38724-06-L-8	6-38724-06-R-8	368
		65	6-38724-01-L-8	6-38724-01-R-8	6-38724-07-L-8	6-38724-07-R-8	368
		80	6-38724-04-L-8	6-38724-04-R-8	6-38724-08-L-8	6-38724-08-R-8	368

Frame				
Striker				
No.	Product			See page
2	Angled striker	Non-handed	9-38551-xx-x-x	408
	Adjustable striker	Non-handed	6-31985-xx-x-x	406